

# **Coupling-Decoupling Network**

## **C D N L-801 AF 4 Banana**

**IEC 61000-4-6**

AE Port	4mm Banana
EUT Port	4mm Banana
Leads	2 twisted pair
Max. Voltage	100 V
Max. Current	0,25 A
IN Port	BNC 50 Ohm
Frequency range	0,15 ... 230 MHz
HF Power Dissipation	4 Watt


# SCHWARZBECK MESS - ELEKTRONIK

Tel.: +49(0)6228/1001 [www.schwarzbeck.de](http://www.schwarzbeck.de) office@schwarzbeck.de

## L 801 AF 4





CDN, Daten 4 Leiter, 4 mm Laborbuchsen

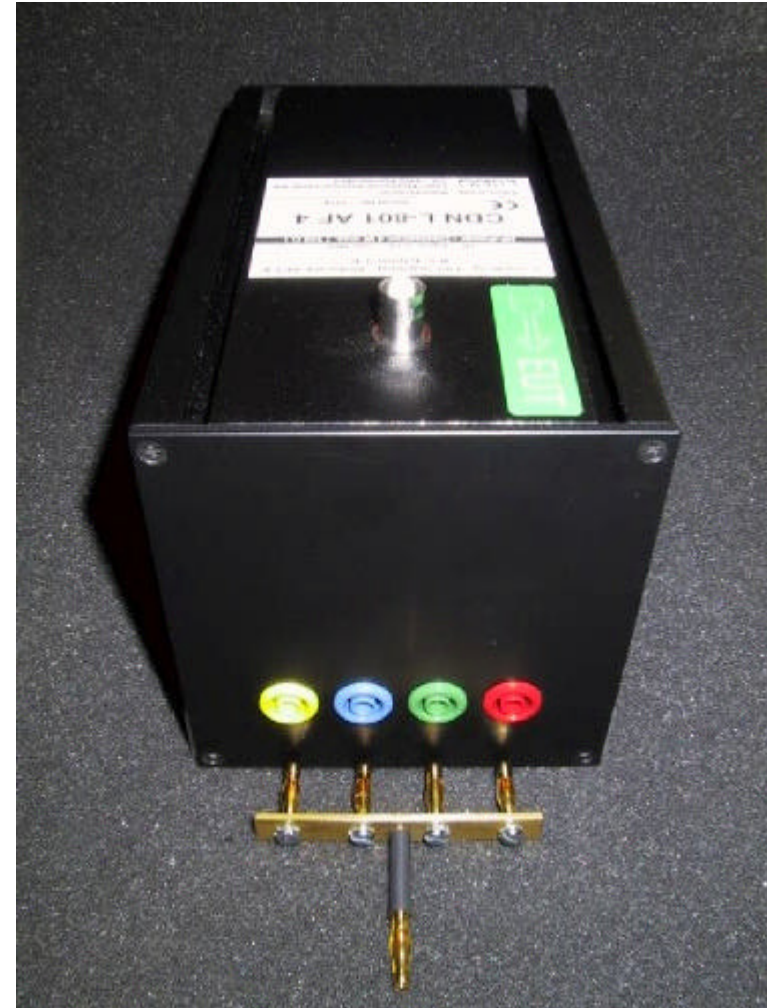

CDN Data 4 leads, 4 mm female connectors

**CDN Impedance and K-factor  
in the frequency range 150 kHz - 230 MHz  
in a test setup according to IEC 61000-4-6**

CDN Type AF4

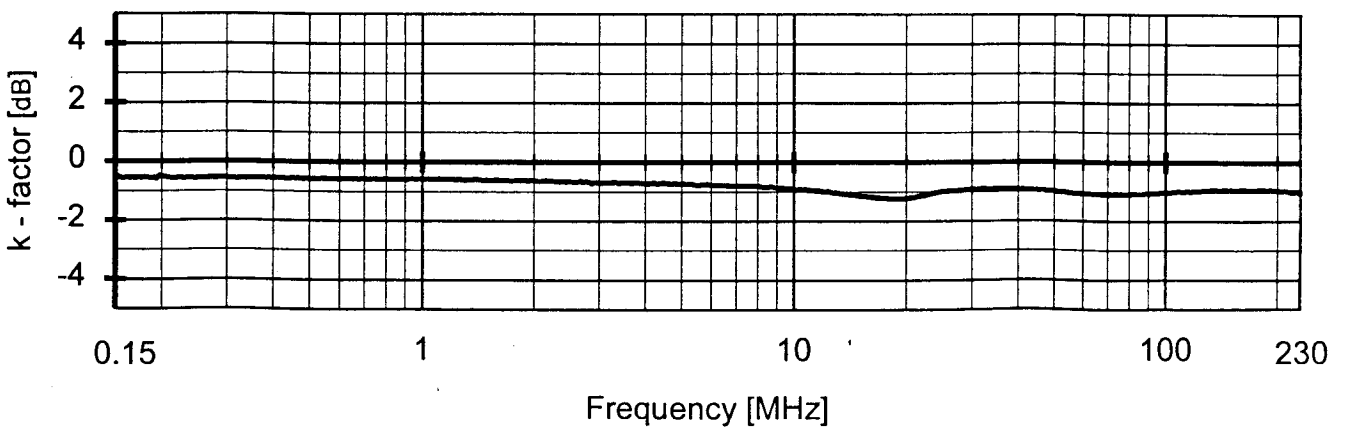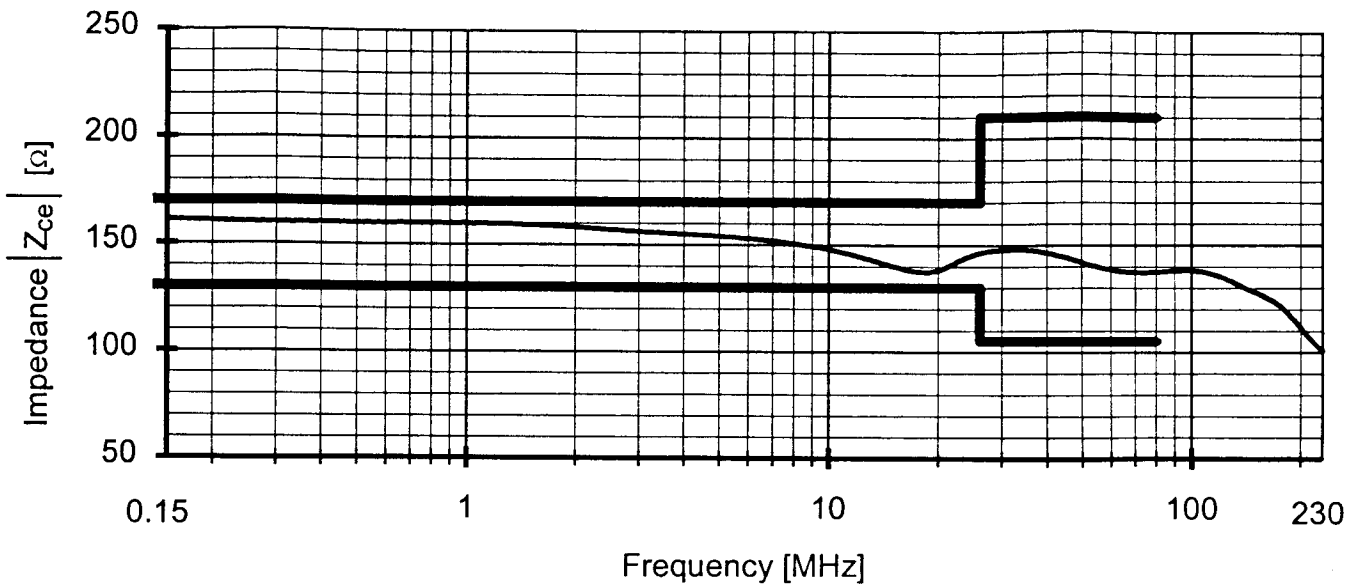

**Equipment used:**

Network Analyzer Typ ZVR      Inv. Nr. 4110  
50 Ω to 150 Ω Adaptor      Inv. Nr. 4159  
50 Ω to 150 Ω Adaptor      Inv. Nr. 4160

**Location:**

EB15  
Date and time: 2002.04.26 11:14  
Reference for K-factor 2002.08.16 08:58  
Measurement Impedance 2002.08.16 08:58  
Measurement K-factor 2002.08.16 09:12